

Monitoring

(is shown only main parameters)

Main:

- fuel level in tanks (up to three tanks);
- fuel flow sensors;
- pump operation;

Application

(is shown only main application)

Fuel Storage



GuardMagic FSM2

Diesel Generator



GuardMagic FSM2

Refrigerator



GuardMagic FSM2

Pump



GuardMagic FSM2

Temperature




GuardMagic FSM2

- temperature (up to Seven thermo sensors)

GuardMagic Stationary Objects Remote Monitoring (GSM/GPRS)

- All in One System;
- Unified Communication Protocol;
- Multi Tank Support;
- Multi Thermo Sensors Support;
- Fuel Storage Monitoring;
- Diesel Generator Monitoring;
- Refrigerator Monitoring;
- Flexible Module Setting.

GSM/GPRS network

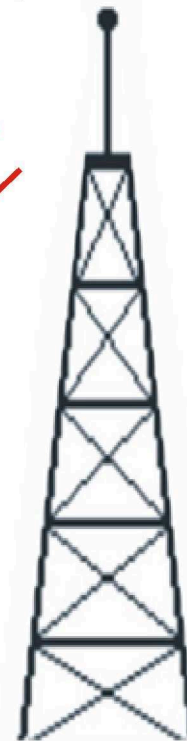

Monitoring Station



Internet